


A-Engine86™ (AE86) 16-bit external data bus

AE86, 16-bit Flash & SRAM, 300KHz ADC/DAC, 40+ I/Os

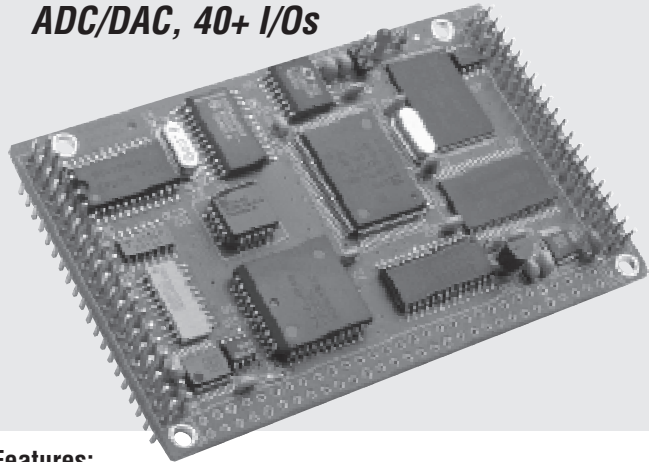

Features:

- 3.6x2.3x0.3" for **AE86**, 2.3x2.2x0.3" for **AC86**
 - -40°C to +80°C, 190/30mA normal/power-save
 - 40 MHz, 16-bit CPU (186), program in C/C++.
 - 256KW ACTF Flash, 2 UARTs, EE, PWM, counter, 32 PIOs
 - 64/256KW 16-bit SRAM, Real-Time Clock and battery*
 - 16-bit ADC, 2 ch. DACs, RS232 and 5V regulator on **AC86***
 - 19 ch. ADCs, 6 DACs, 24 PPIs and 3rd UART on **AE86***
- *optional

The **A-Engine86™(AE86)** and **A-Core86™(AC86)** are high performance C/C++ programmable controller modules based on the 40MHz, 16-bit CPU (186).

Offering a 16-bit external data bus, the **AE86** and the **AC86** support on-board 256KW 16-bit ACTF flash, optional 256KW 16-bit battery-backed SRAM, 3 timers, PWMs, 32 PIOs, 512-byte serial EEPROM, two DMA-driven serial ports (up to 115,200 baud), an optional real-time clock (RTC72423), and optional 2 ch. 12-bit serial DAC (LT1446, 10KHz, 0-4.095V).

The **AE86** has 24 PPI I/Os. Optional 3rd UART (SCC2691), 8 ch. 12-bit parallel ADC (AD7852, 300KHz, 0-5V), 11 ch. 12-bit serial ADC(P2543,10KHz,0-5V), and 4 ch. 12-bit parallel DAC(DA7625, 5 μs, 0-2.5V) can be installed.


The **AC86** supports an optional 16-bit parallel ADC (LTC1605, 100K, ±10V). Optional RS232 drivers and a 5V regulator can be installed, allowing 9-12V DC power input.

Add-on Options:

- 1) 16-bit SRAM: 256KW \$40
- 2) Real-time clock (RTC) and battery \$20
- 3) 3rd UART (SCC2691), **AE86** only \$20
- 4) 4 ch. 12-bit DAC, 200 KHz (DA7625) for **AE86** \$60
or 100K 16-bit ADC(LTC1605) for **AC86** \$60
- 5) 2 ch. 12-bit DAC (LT1446) \$40
- 6) 8 ch. 12-bit ADC, 300KHz (AD7852), **AE86** only \$40
- 7) 11 ch. 12-bit ADC (P2543), **AE86** only \$30
- 8) RS232 drivers and 5V regulator, for **AC86** \$15
- 9) Sockets for expansion: two 20x2, one 30x2 \$9

A-Core86™

**100K 16-bit Parallel ADC (LTC1605)
16-bit flash, SRAM
16-bit external data bus.**

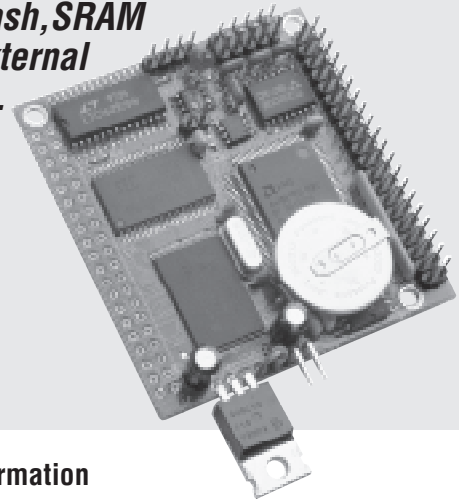

Ordering Information

AE86	\$189/\$151/\$113/\$66	Qty 1/100/1K/5K+
AC86	\$119/\$99/\$69/\$39	Qty 1/100/1K/5K+

Includes: 186, 40 MHz, I/Os, 2 UARTs, 3 timers, PPI (AE86 only), watchdog, EE, 256KW ACTF flash, 64KW SRAM.

NOT including add-on options. OEM option discounts available.

Typical Order Example:

A-Engine86™, 4 ch. 12-bit DAC (DA7652)

AE86 + 4 = \$189 + \$60 = \$249

AE86 or **AC86** signals on J1 and J2 headers, as shown below:

J1 Signal

Function	Pin#	Pin#	Function
VCC 1	2 GND
MPO 3	4 P1
RxD 5	6 GND
TxD 7	8 D0
VOFF 9	10 D1
/BHE 11	12 D2
D15 13	14 D3
/RST 15	16 D4
RST 17	18 D5
P16 19	20 D6
D14 21	22 D7
D13 23	24 GND
 25	26 A7
D12 27	28 A6
/WR 29	30 A5
/RD 31	32 A4
D11 33	34 A3
D10 35	36 A2
D9 37	38 A1
D8 39	40 A0

J2 Signal

Function	Pin#	Pin#	Function
GND 40	39 VCC
P4 38	37 P14
/CTS0 36	35 P6
TxD0 34	33 /INT4
RxD0 32	31 /RTS1
P5 30	29 P1
TxD1 28	27 /RTS0
RxD1 26	25 GND
P2 24	23 P15
/CTS1 22	21 /INT3
P0 20	19 /INT2
P25 18	17 P24
 16	15 P3
 14	13 P17
P10 12	11 P13
VCC 10	9
/INT0 8	7 /NMI
/INT1 6	5 P12
P26 4	3 P29
GND 2	1 GND



1724 Picasso Avenue, Davis, CA 95616 USA
Tel: 530-758-0180 • Fax: 530-758-0181

CE FC

sales@tern.com

http://www.tern.com